





- **CT2714WS** Laboratory Single Faucet, Panel Mounted, 6" Rigid/Swing Gooseneck
- **CT2714L-WS** Same as Above Except with Handle on Left Side



WATER SAVER RENEWABLE UNIT WITH REPLACEABLE STAINLESS STEEL SEAT

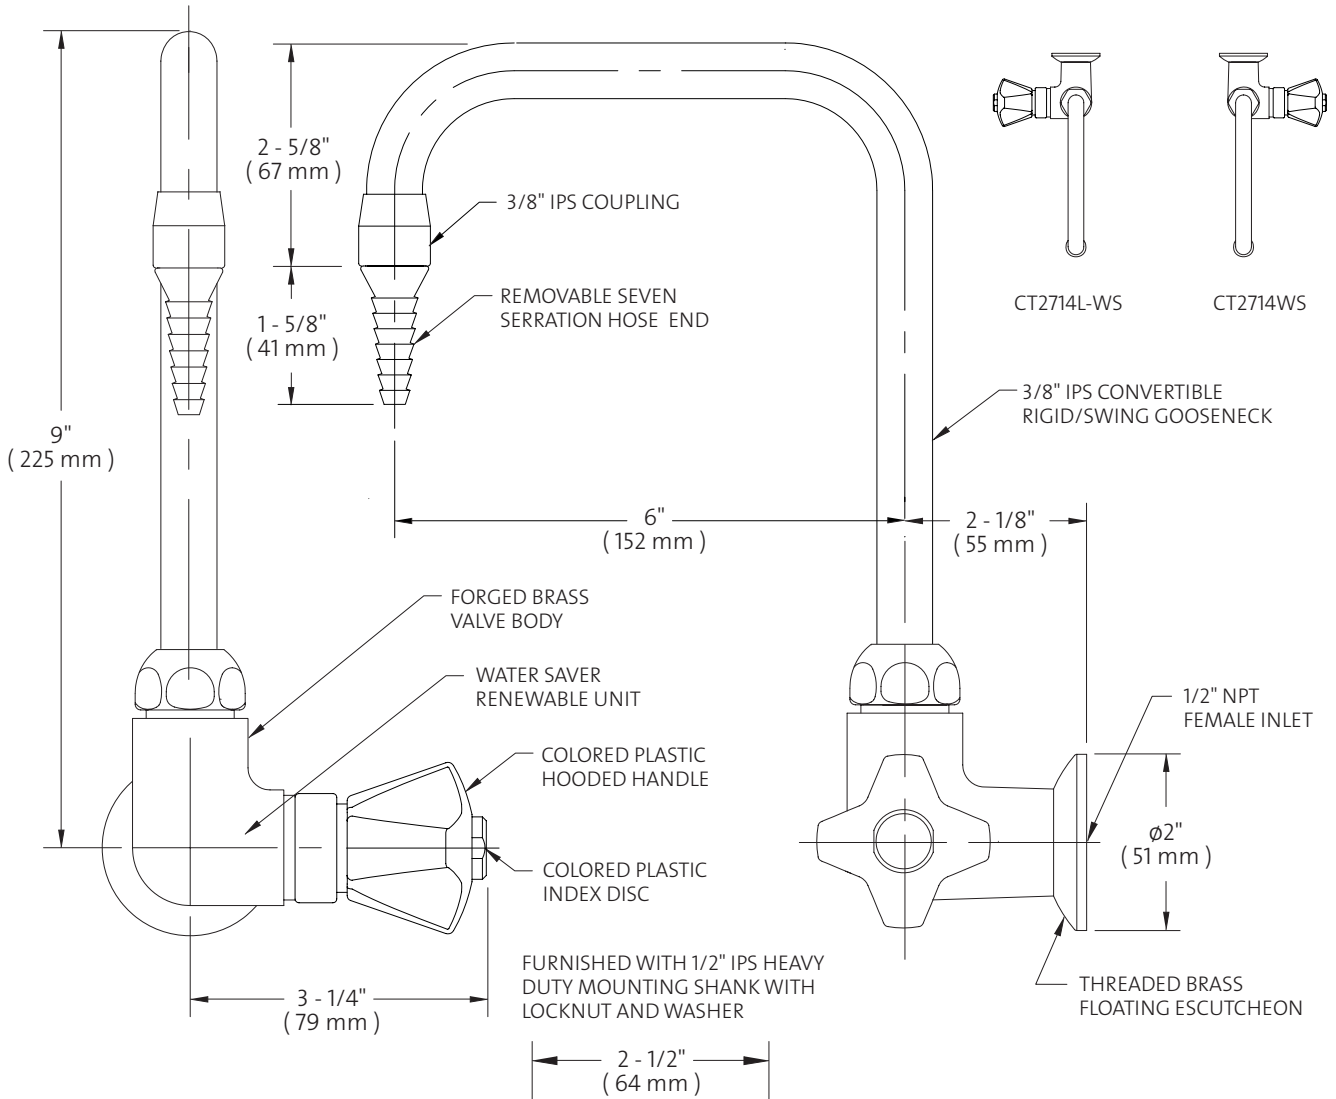

### NOTES:

1. FIXTURE IS CERTIFIED BY CSA INTERNATIONAL TO COMPLY WITH ASME A112.18.1M AND CSA B125.1.
2. FIXTURE IS FULLY ASSEMBLED (WITH MOUNTING SHANK LOOSE) AND FACTORY TESTED PRIOR TO SHIPMENT.
3. FIXTURE HAS FEMALE INLET FOR CONNECTION TO SUPPLY. FLOATING ESCUTCHEON IS THREADED TO WALL TO CONCEAL ANY GAP BETWEEN FIXTURE AND WALL.
4. UNLESS OTHERWISE SPECIFIED, FIXTURE IS FURNISHED IN RIGHT HAND CONFIGURATION.
5. FIXTURE IS FURNISHED WITH COLORTACT POWDER-COATED FINISH.

Measurements may vary  $\pm 1/4$ ".

© 2008 / WaterSaver Faucet Co.